

## Product datasheet

CLF-48W-NW

**LED ceiling light 48 W | 4000 K**

- Placement in office and residential spaces
- Bridgelux LED
- IP40



## General information

• Model	CLF-48W-NW
• Body material	Metal
• LED chip	Bridgleux
• Environment	Indoor lighting
• Placement	Residential spaces, retail, offices
• Product color	Black
• IP protection rate	IP40
• Weight	2,790 kg


## Electrical Specifications

• Power Consumption	48 W
• Input Voltage	AC 220 V
• Dimmable Function	No
• Replacing LED	Yes
• Replacing power supply	Yes / LIFUD DRIVER

## Lighting Specifications

• Luminous flux	4800 lm
• Luminous efficiency	100 lm / W
• Color of the light	Neutral white
• CCT	4000 K
• Color Render Index (CRI)	> 90
• Beam Angle	120 °
• Life Span	30 000 working hours

## Photometric Diagram

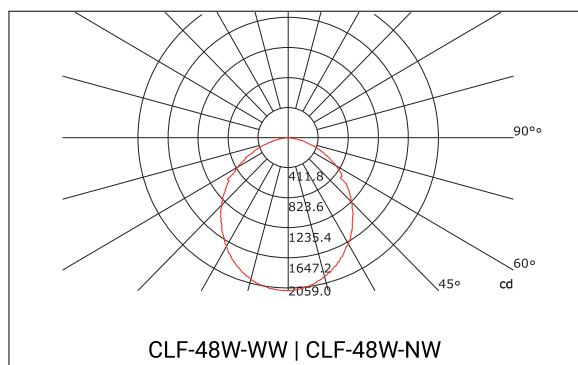

## Package information

- Package dimensions 460 x 460 x 80 mm
- Gross weight 3,300 kg
- Transport package

## Dimensions

- Product dimensions  $\varnothing$  450 x 65 mm

