

Product datasheet

APX-100

LED flood light 100 W | 6000 K

- Indoor and outdoor lighting
- Wide beam angle
- Without flickering
- Usable in all weather conditions



General information

• Model	APX-100
• LED chip	EPISTAR
• Body material	Aluminium
• Environment	Indoor and outdoor lighting
• Product color	Black
• Operating Temperature	from - 20 °C to + 40 °C
• Mounting	Surface mounting
• IP Protection Rate	IP65
• Weight	1,335 kg

Electrical Specifications


• Power Consumption	100 W
• Input Voltage	AC 85 - 265 V / 50 - 60 Hz
• Dimmable Function	No
• Replacing LED	No
• Replacing Power Supply	No

Lighting Specifications

• Luminous flux	9000 lm
• Luminous efficiency	90 lm / W
• Color of the light	Cold White
• CCT	6000 K
• Color Render Index (CRI)	≥ 80
• Beam Angle	120 °
• Life Span	30 000 working hours

Dimensions

• Product dimensions	310 x 229 x 40 mm
----------------------	-------------------

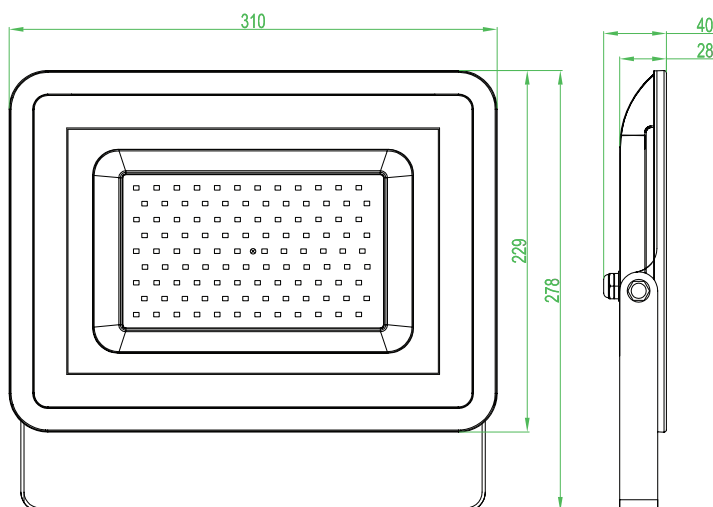

Packing Information

- Package dimensions 310 x 240 x 50 mm
- Gross Weight 1,570 kg
- Transport package