

Product datasheet

CX-R01-24CW

LED panel light 24 W | 6500 K

- Placement in office and residential spaces
- High RA factor
- High lumenation
- Homogeneous light



General information

• Model	CX-R01-24CW
• LED chip	EPISTAR
• Body material	Aluminium
• Environment	Indoor lighting
• Product color	White
• Mounting	Recessed
• IP Protection Rate	IP44
• Weight	0,665 kg


Electrical Specifications

• Power Consumption	24 W
• Input Voltage	AC 85 - 265 V / 50 - 60 Hz
• Dimmable Function	No
• Replacing LED	No
• Replacing Power Supply	Yes

Lighting Specifications

• Luminous flux	2400 lm
• Luminous efficiency	100 lm / W
• Color of the light	Cold white
• CCT	6500 K
• Color Render Index (CRI)	≥ 80
• Beam Angle	120 °
• Unified Glare Rating (UGR)	> 19
• Life Span	30 000 working hours

Photometric Diagram

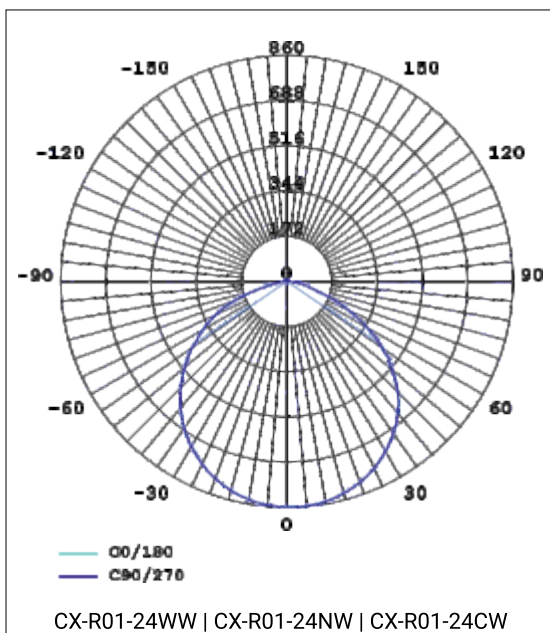

Packing Information

- Package dimensions 345 x 300 x 40 mm
- Gross Weight 0,865 kg
- Transport package 20 pieces

Dimensions

- Product dimensions \varnothing 295 x 28 mm
- Installation part dimensions \varnothing 280 x 25 mm

